

■ GIULIA ■ 1750 ■ 2000 AND MONTREAL MODELS ■

■ WHEEL AND SUSPENSION ■

■ FRONT END GEOMETRY ■

■ AMENDMENT TO SPECIFICATIONS ■

(Supplement to DIASS Public. 1507)


Alfa Romeo

SHOP MANUAL

Alfawiki.nl



LOADS FOR CAR TRIM

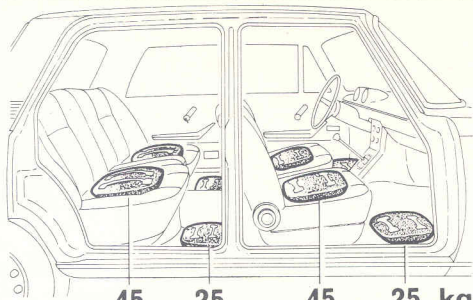

- 4-door models:
load as shown = 280 kg total weight
- 2-door models:
load the front only = 140 kg total weight

SPECIFIC
dimensions in millimetres


GIULIA 1300

GIULIA 1300 TI

from chassis no.
1.029.001-L.H.D.

from chassis no. } 1.029.001-L.H.D.
765.001-R.H.D.

FRONT SPRING SAG

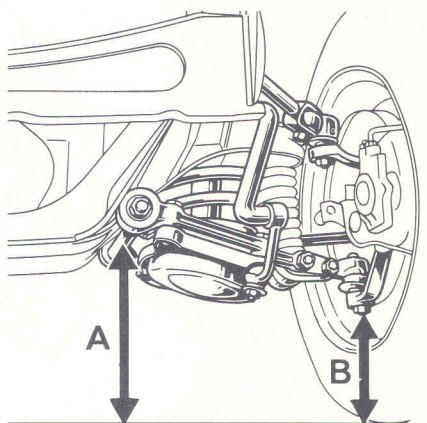


A minus B =

34 ± 5

34 ± 5

REAR SPRING SAG

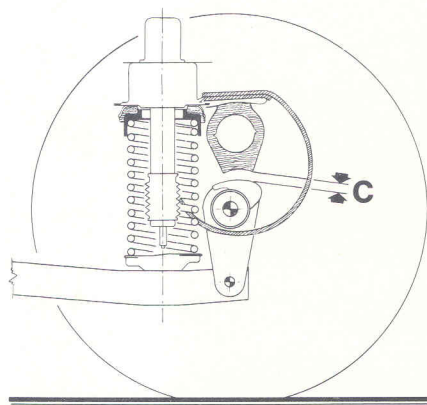


C =

36 ± 5

36 ± 5

CAMBER

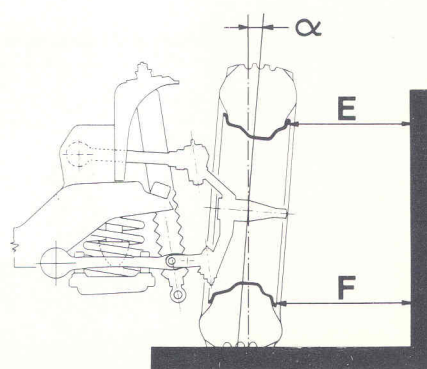

$\alpha =$
(1)

$- 10' / + 50'$

$- 10' / + 50'$

F =

$E - 1 / + 5$

$E - 1 / + 5$

ACTIONS

unless otherwise stated

(1) Maximum difference in camber angle between R.H. and L.H. wheel = $0^{\circ} 40'$

NOTE - Not adjustable. Check the chassis and suspension arms if necessary

1300 SUPER	1600 SUPER	1750 BERLINA	2000 BERLINA	2000 GT VELOCE	2000 SPIDER VELOCE
from chassis no. 2.220.001-L.H.D. 2.294.001-R.H.D.	from chassis no. 1.875.001-L.H.D. 784.001-R.H.D.	from chassis no. 1.740.001-L.H.D. 1.464.001-R.H.D.			

34 ± 5	34 ± 5	34 ± 5	34 ± 5	34 ± 5	24 ± 5
36 ± 5	36 ± 5	36 ± 5	36 ± 5	41 ± 5	33 ± 5
- 10' / + 50'	- 10' / + 50'	- 10' / + 50'	- 10' / + 50'	- 10' / + 50'	- 10' / + 50'
_____	_____	_____	_____	_____	_____
E - 1 / + 5	E - 1 / + 5	E - 1 / + 5	E - 1 / + 5	E - 1 / + 5	E - 1 / + 5

S P E C I F I C
dimensions in millimetres

GIULIA 1300


from chassis no.
1.029.001-L.H.D.

GIULIA 1300 TI

from chassis no.
1.029.001-L.H.D.

from chassis no.
765.001-R.H.D.

CASTOR

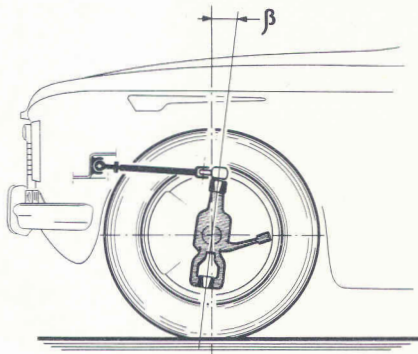


$$\beta =$$

(4)

$$1^{\circ} / 2^{\circ}$$

$$1^{\circ} / 2^{\circ}$$

L.H.D.

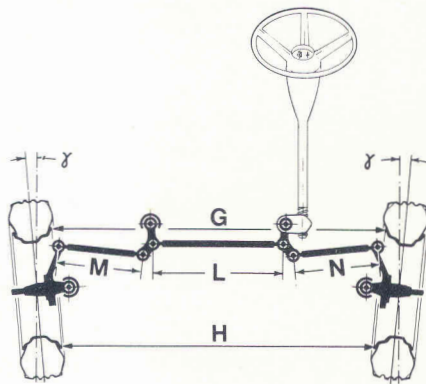

$$\gamma =$$

$$13'$$

$$13' \text{ (1)}$$

$$14' \text{ (2)}$$

$$G =$$

$$H + 3$$

$$H + 3$$

$$M =$$

$$N$$


(5)

$$N - 5$$

(5)

TOE-IN

R.H.D.

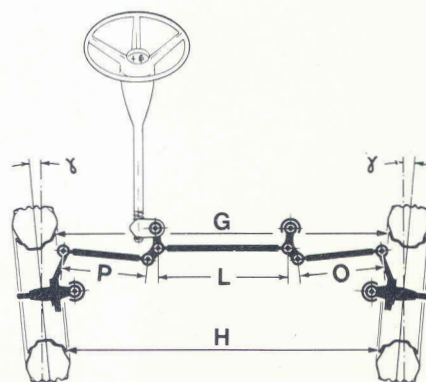

$$\gamma =$$

$$13' \text{ (1)}$$

$$14' \text{ (2)}$$

$$G =$$

$$H + 3$$

$$O =$$

$$P + 5 \text{ (3)}$$

(6)

ACTIONS


unless otherwise stated

- (1) Wheel: 4 1/2 j x 15" - 390 mm dia.
- (2) Wheel: 5 j or 5 1/2 j x 14" - 365 mm dia.
- (3) Steering arm P.N. 105.49.24.201.00 marked with a white dot
- (4) Maximum difference in castor between R.H. and L.H. wheel = 20'
- (5) Side rod length N = 264/280 mm
- (6) Side rod length P = 259/275 mm
- L = Track rod length = 530/550 mm

1300 SUPER		1600 SUPER		1750 BERLINA		2000 BERLINA	2000 GT VELOCE	2000 SPIDER VELOCE
from chassis no. 2.220.001 2.294.001 L.H.D. R.H.D.		from chassis no. 1.875.001 784.001 L.H.D. R.H.D.		from chassis no. 1.740.001 1.464.001 L.H.D. R.H.D.				

1° / 2°	1° / 2°	1° / 2°	1° / 2°	1° / 2°	1° / 2°
13' (1) 14' (2) _____ H + 3 _____ N - 5 (5)	13' (1) 14' (2) _____ H + 3 _____ N - 5 (5)	14' _____ H + 3 _____ N - 5 (5)	14' _____ H + 3 _____ N - 5 (5)	14' _____ H + 3 _____ N - 5 (5)	14' _____ H + 3 _____ N - 5 (5)
13' (1) 14' (2) _____ H + 3 _____ P + 5 (3) (6)	13' (1) 14' (2) _____ H + 3 _____ P + 5 (3) (6)	14' _____ H + 3 _____ P + 5 (3) (6)	14' _____ H + 3 _____ P + 5 (6)	14' _____ H + 3 _____ P + 5 (6)	14' _____ H + 3 _____ P + 5 (6)

LOADS FOR CAR TRIM

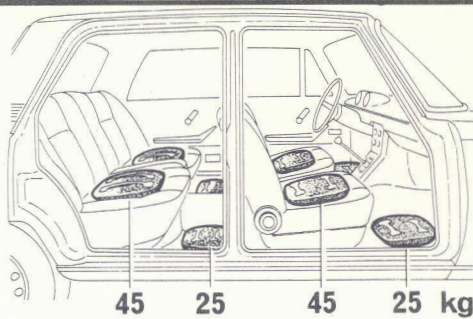

- 4-door models:
load as shown = 280 kg total weight
- 2-door models:
load the front only = 140 kg total weight

S P E C I F I C
dimensions in millimetres

GT 1300 JUNIOR


JUNIOR 1300
ZAGATO

from chassis no.
1.260.001-L.H.D.

from chassis no.
1.295.001-R.H.D.

from chassis no.
1.800.001-L.H.D.


FRONT SPRING SAG

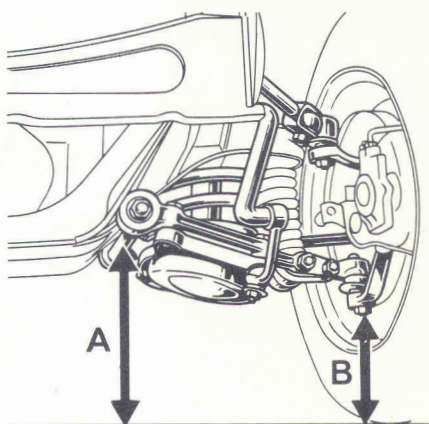

A minus B =

 24 ± 5 34 ± 5 24 ± 5


REAR SPRING SAG

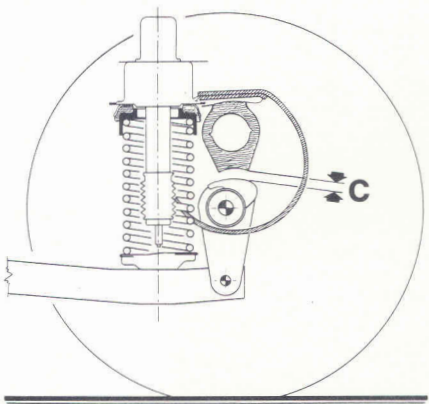

C =

 41 ± 5 41 ± 5 33 ± 5

CAMBER

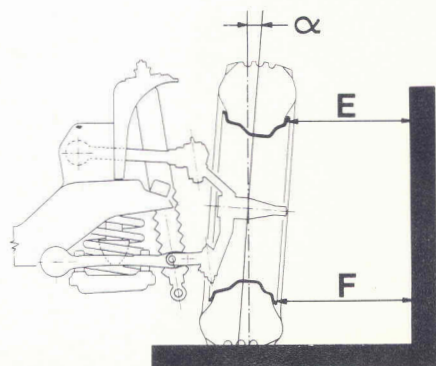
 $\alpha =$
(1)
 $- 10' / + 50'$ $- 10' / + 50'$ $- 10' / + 50'$

F =

 $E - 1 / + 5$ $E - 1 / + 5$ $E - 1 / + 5$

ACTIONS

unless otherwise stated

(1) Maximum difference in camber angle between R.H. and L.H. wheel = $0^{\circ} 40'$




NOTE - Not adjustable. Check the chassis and suspension arms if necessary

1750 GT VELOCE	MONTREAL	SPIDER 1300 JUNIOR	1750 SPIDER VELOCE
from chassis no. $\left\{ \begin{array}{l} 1.375.001\text{-L.H.D.} \\ 1.454.001\text{-R.H.D.} \end{array} \right.$		from chassis no. $\left\{ \begin{array}{l} 1.841.001\text{-L.H.D.} \\ 1.855.001\text{-R.H.D.} \end{array} \right.$	from chassis no. $\left\{ \begin{array}{l} 1.820.001\text{-L.H.D.} \\ 1.835.001\text{-R.H.D.} \end{array} \right.$

34 $\pm$ 5	24 $\pm$ 5	24 $\pm$ 5	24 $\pm$ 5
41 $\pm$ 5	41 $\pm$ 5	33 $\pm$ 5	33 $\pm$ 5
- 10' / + 50'	- 10' / + 50'	- 10' / + 50'	- 10' / + 50'
_____	_____	_____	_____
E - 1 / + 5	E - 1 / + 5	E - 1 / + 5	E - 1 / + 5

S P E C I F I C
dimensions in millimetres

GT 1300 JUNIOR		JUNIOR 1300 ZAGATO
from chassis no. 1.260.001-L.H.D.	from chassis no. 1.295.001-R.H.D.	from chassis no. 1.800.001-L.H.D.

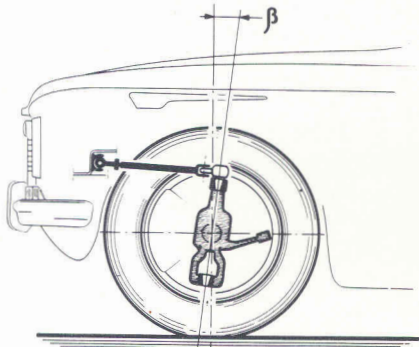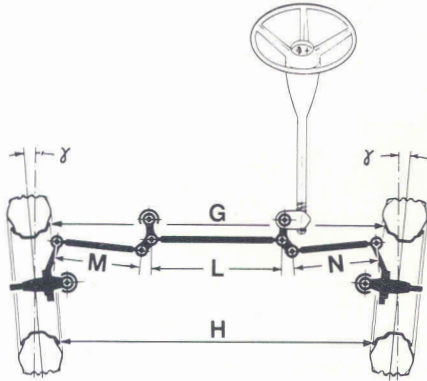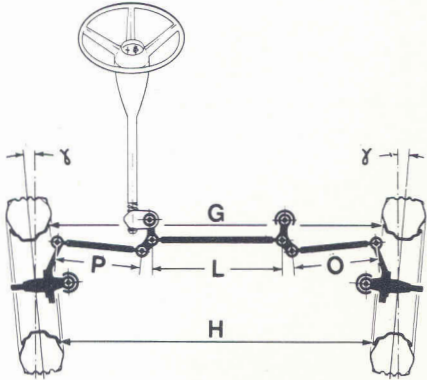TOE-IN	CASTOR 	$\beta =$ (4)	$1^{\circ} / 2^{\circ}$	$1^{\circ} / 2^{\circ}$
	L.H.D. 	$\gamma =$ _____ $G =$ _____ $M =$	$13' \text{ (1)}$ $14' \text{ (2)}$ $H + 3$ $N - 5$ (5)	$14'$ $H + 3$ $N - 5$ (5)
	R.H.D. 	$\gamma =$ _____ $G =$ _____ $O =$	$13' \text{ (1)}$ $14' \text{ (2)}$ $H + 3$ $P + 5 \text{ (3)}$ (6)	$14'$ $H + 3$

ACTIONS

unless otherwise stated

- (1) Wheel: 4 1/2 j x 15" - 390 mm dia.
- (2) Wheel: 5 j or 5 1/2 j x 14" - 365 mm dia.
- (3) Steering arm P.N. 105.49.24.201.00 marked with a white dot
- (4) Maximum difference in castor between R.H. and L.H. wheel = 20'
- (5) Side rod length N = 264/280 mm (for MONTREAL model = 256/272 mm)
- (6) Side rod length P = 259/275 mm (for MONTREAL model = 256/272 mm)
- L = Track rod length = 530/550 mm (for MONTREAL model = 643/663 mm)

1750 GT VELOCE		MONTREAL	SPIDER 1300 JUNIOR		1750 SPIDER VELOCE	
from chassis no. 1.375.001-L.H.D.	from chassis no. 1.454.001-R.H.D.		from chassis no. 1.841.001-L.H.D.	from chassis no. 1.855.001-R.H.D.	from chassis no. 1.820.001-L.H.D.	from chassis no. 1.835.001-R.H.D.

1° / 2°	1° / 2°	1° / 2°	1° / 2°
14'	14'	13' (1) 14' (2)	14'
H + 3	H + 3	H + 3	H + 3
N - 5 (5)	N (5)	N - 5 (5)	N - 5 (5)
14'	14'	13' (1) 14' (2)	14'
H + 3	H + 3	H + 3	H + 3
P + 5 (3) (6)	P (6)	P + 5 (3) (6)	P + 5 (3) (6)

Alfa Romeo

DIREZIONE ASSISTENZA TECNICA
Centro Direzionale
20020 — ARESE (Milano)

Public. N. 1838 R2
data di stampa 10/77 - 600

Printed in Italy
LITOROLA - MILANO

All rights reserved. This book, or parts thereof,
may not be reproduced in any form without
permission of ALFA ROMEO S.p.A.

